

Product range





Catalogues


PNEUMATICS



FLUIDITY

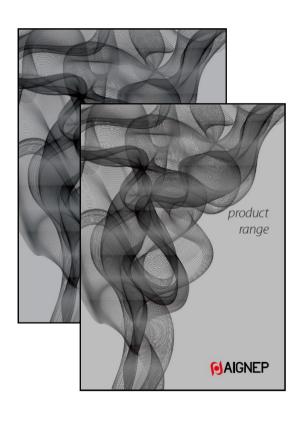

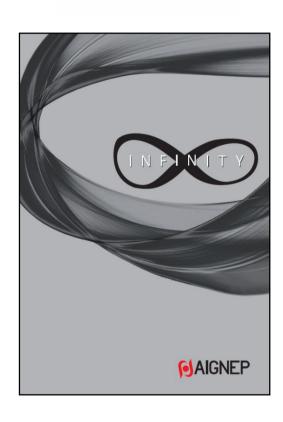

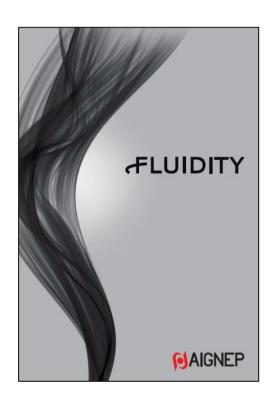



Pneumatic Range



| FITTINGS | 」Push-in |
|--------------------|--|
| | Adaptors |
| | Push-on |
| | Compression |
| | Function |
| | Ghilux |
| QUICK COUPLINGS | Standard Multisocket Safety Water |
| AUTOMATION | Solenoid valves Actuators FRL |



The most popular series:



50000

First Push-in series launched -0.99 / 20 bar -20 / +80 °C Compressed air,vacuum,water

Top quality technopolymer
-0.99 / 20 bar
-20 / +80 °C
Compressed air, vacuum, water

55000 *56000 (compact)






57000 *89000(inch)

Full metal solution
-0.99 / 20 bar
-20 / +80 °C
Compressed air, vacuum, water, steam, all fluids compatible



Universal thread: BSPP- BSPT - NPTF

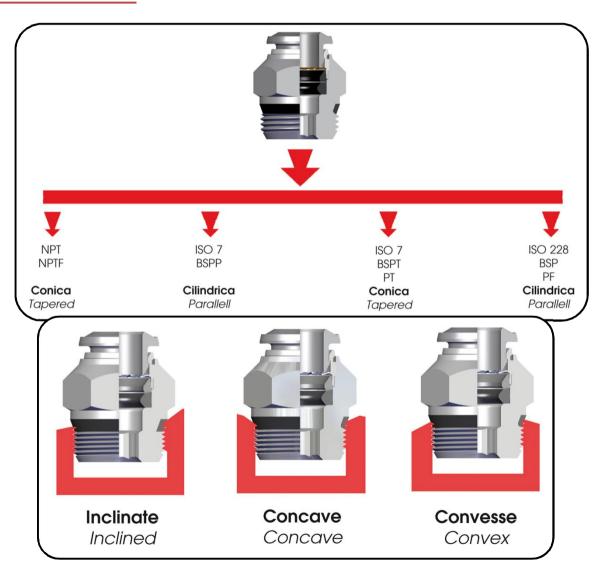



Special application series:



New 40000V

New serie for heavy duty
-0.99 / **30 bar**-15 / **+130 °C**

Compressed air, vacuum, water, steam Double gripper

58000 High pressure

Lubrification and high pressure 0 / **150 bar**-30 / +130 °C
Oil and grease





Food & Beverages:







70000 serie

NSF.

59000 serie

60000 serie

Brass – NSF/ANSI169

softdrinks, milk, beer

Brass / NSF/ANSI169

softdrinks, milk, beer drinking water / coffee







Stainless steel AISI316L

In agressive environment







Push-on, Adapters



1000

All Fluids Compatibility

Proceure and temperature

Pressure and temperature related to the tube

Orienting items -20 / +80 °C

Compressed air, all fluids compatible

Supersafe

Vibration environment

Adapters



Complete range M5 to 1"

Pressure may vary according to the item +300°C

Compressed air, water, oil

Largest range ever on the market

Nickel-plate protection



Compression fittings







9000, 10000, 13000 series

All Fluids Compatibility
Metal tube connection
Orienting items -60/ +300°C
Compressed air, water, oil, general industrial fluids
3 different standards available
Up to bigger diameter (22mm)

*Is not possible to combine nuts and olives of different series




Function




New 56900 Compact flow reg











Ghilux



FKM -15 / +130 °C EPDM -40 / +130 °C HNBR -30 / +130 °C

MINIBALL VALVE GHILUX

Compact and top quality

-0.99 / 20 bar

-20 / +80 °C

Compressed air, water, oil, 1° and 2° family gasses (medium pressure)
3° family gasses (low pressure)
Different kind of connection available









Ghilux



UNIQUE DESIGN AND TECHNOLOGY BY AIGNEP





Quick Couplings

The range













Quick Couplings


Range and interchangeability:

| PLUG PROFILE | 1:1 | STANDARD | SERIE PLUG | STANDARD COUPLINGS | MULTI | SERIE SAFETY | SERIE | | | | | | | |
|--------------|-------------|------------------------------------|------------------------------|---------------------|------------------|-----------------|-------------------|--|--|------------------------------------|-------------------------|-----------------------|---------------------------------|--------------------------|
| | DN S | MICNON | 210 Rg 13.11 | 110 Pag 13.11 | | | | | RECTUS/LEGRIS RACKER 21/90 | CAMOZZI 9050 - \$150 | CEJN 220 | | FESTO KD-KS 3 | |
| | DN 5 | MICNON DOUBLE SHUT OFF | 280 Rg 13.00 | 180 Pag 13.30 | | | | | RECTUS/FARKER 21/90 | CAMOZZI 5050 - 5150 | CEJN 200 | | | |
| | DN 2.5 | UNI-ISO 6150-A6 | 200 Pag. 15.7 | 100 Pag. 16.7 | | | 3 | | | | | | FESTO KD - KS 2 | |
| | DN 5.5 | UNI-ISO 6150-B12 INDUSTRIAL 1/4 | 220 Reg 18.17 | 120 Pag 13.17 | 190 Rg 16.84 | 620 Rg vs.rr | | ABLIDAD | RECTUSA EGRIS 23/24 PAGRER 23/30 - 1/4 TEMA 1400 | HANSEN 3000 | CEJN 310 | INDUSTRIAL 1/4 | GROWELLE 600 | LIS - MIL SPEC C-4109 |
| | DN 9 | UNI-ISO 6150-B15 INDUSTRIAL 3/8 | 230 Rg 11.20 | 130 Pag 10.20 | 720 Ag 11.10 | | | NTERCAMBI | RECTUSALICATES 30 PAGNER 30 - 3/8 | HANSEN 4000 | CE.IN 430 | INDUSTRIAL 3/8 | GROWELLE 900 | US - MIL SPECC-4109 |
| | DN 12 | UNI-ISO 6150-B17 INDUSTRIAL 1/2 | 810 Rig tuar | 710 Pag ts.ar | | | | NUSSER - EAU - AGUA - ÁGUA DL - MUILE - ACEITE - ÓLEO DL - MUILE - ACEITE - ÓLEO INTERCAMBIA BLITÀ - INTERCHANGE - AUSTAUSCHBARKEIT - INTERCHANGEABLITÈ - INTERCAMBIABLIDAD - INTERCAMBIABLIDAD E | RECTUS 37 | HANSEN 5000 | CEIN 550 | | GROWELLE 1300 | US - MIL SPEC C-4109 |
| | DN 5.5 | UNI-50 6150-C10 | 240 Rg 1s.m | 140 Pag 11.36 | 20.3 | 9 | | LUFT - A | RECTUS/LEGRIS 18 | | | | | |
| | N 7.5 - 7.8 | EUROPEAN | 260 63260 Pagisan Pagisan | 160 Pag 18.88 | 190 Rg 11.M | 660 Rg 11.81 | 63190 Rg 16.00 | ARIA - AIR - LUFT - AR - AIRE BLITÈ - INTERCAMBIABLIDAL | RECTUS/LEGRIS 25/26/1600/1625 TEMA 1600 | CAMOZZI 5080 - 5180 | CEJN 330 | | FESTO KD - KS 6 KD - KS 4 | |
| | DN 10 | EUROPEAN DN 10 | 820 hg u.n | 720 Pag 11.80 | | 4444 | | A | RECTUS/LEGRES 27 | | CEJN 410 | | | |
| | DN 5.5 | SZTWZ | 270 Rg 11.50 | 170 Pag 11.50 | 190 Rig 11.34 | 670 Rg 11.81 | | · INTERC | RECTUS/LECRIS 14/22 PACKER 50 | HANSEN 210 | CEJN 300 | | ARO 210 | |
| | DN 7.5 | JAPANESE | 500 Rig tsat | 400 Pag ts.at | | | | CHBARKEN | RECTUSALIGRIS 13 | SMC KX130 | CEJN 315 | NITTO KOHKI 200 | | |
| | DN 5 | TALIAN | 250 Rog 16.20 | 120 Pag 11.21 | 190 Rg 16.81 | 650 Rg 11.74 | | LUSTAUS C | | | | | | |
| | DN 2.7 | MN | 800 Rig 11.46 | 700 Pag tsan | | | | VG€-, | RECTUS/LEGRIS PARKER 20/21 | | | | FESTO KD - KS 2 | |
| | m | FRENCH | 510 Rg 11.80 | 410 Pag 11.80 | | | | GUA | RECTUS 606 | | | | | |
| | DN 12 | FRENCH | 520 Rg 11.00 | 420 Pag 11.00 | | | | АGUA - А E - ÓLEO ПА - IN 1 | RECTUS 612 | | | | | |
| | DN 6 | INTERNATIONAL | 530 Rug 10.89 | 430 Pag tuer | | | | R - EAU -, E - ACEN MBIA BIL | RECTUS 86 | DME 1/4 | | | | |
| | DN 9 | INTERNATIONAL | 540 Pag. 13.100 | 440 Rg 13.100 | | | | ACQUA- WATER - WASSER- EAU- AGUA - ÁGUA OUO - OIL - OIL - MILE - ACETE - ÓLEO INTERCAMBIA BILITÀ - MTERCI | RECTUS 87 | DME 3/8 | | | | |
| | DN 6 | EUROPEAN | S60 Rag valvon | 460 Reg. 15. 100 | | | | 10 - OIL | RECTUS 10 | HASCO ZBO/E11HT/9 [Øe 9] | CEJN 220 - 221 - 225 | | | |
| | DN 9 | EUROPEAN | 570 Reg. 10.108 | 470 Reg. 10.108 | | | | NCO/N | RECTUS 11 | HASCO Zao/s11HT/13 (Øe 13.5) | | | | |




Quick Couplings

Place the Plug on the Ruler & Discover the Coupling you need!

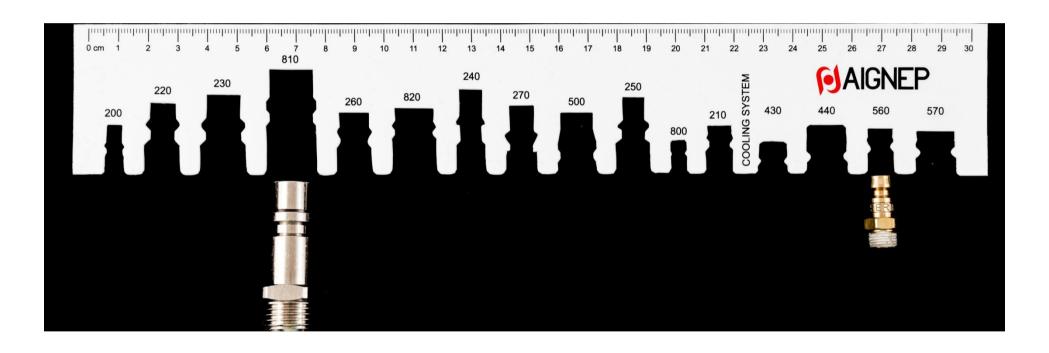




Valves



- 01V MANUAL, PNEUMATIC, SOLENOID AND ASSISTED
- 02V, 03V, 04V: MICROVALVES, MECHANICAL AND PUSHBOTTON
- 05V MULTIPLE BASES
- 06V PEDALS
- 07V SOLENOID VALVES
- 08V NAMUR
- 12V ROTARY HAND LEVER
- 15V MODULAR VALVE
- ATEX Ex

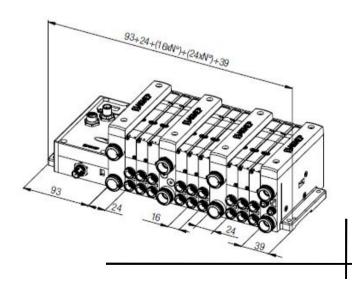




Valves

Quality - Made in Italy





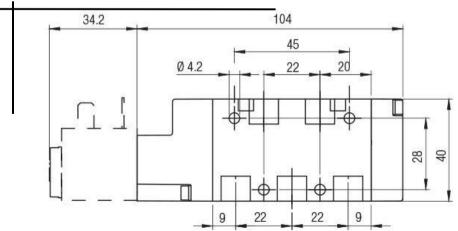



Valves


15V MODULAR VALVE

2017
Product
Of The
Year





Actuators

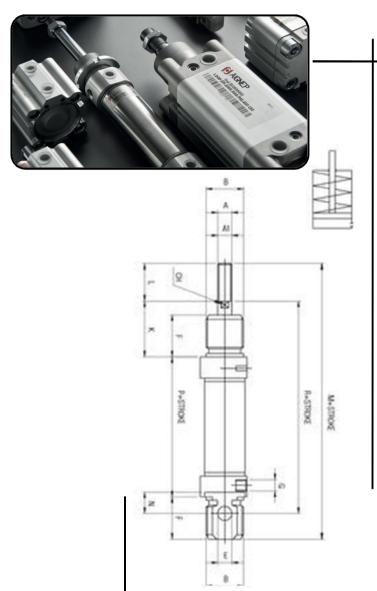

- CARTRIDGE
- MINI CYLINDER ISO 6432
- ROUND CYLINDER
- SHORT STROKE
- STANDARD ISO 15552
- STANDARD ISO 6431*
- COMPACT ISO 21287
- COMPACT ISO 15552
- GUIDE DUAL ROD SLIDE RODLESS-ROTARY-GRIPPERS
- ATEX (Ex

*(also stainless steel version)



Actuators


Wide range and top quality



FRL Units



- •FILTERS REGULATORS LUBRICATORS
- •SHUT OF VALVES SOFT START VALVE WITH QUICK EXHAUST
- •3 DIFFERENT SIZES
- Mini AVAILABLE
- New design project

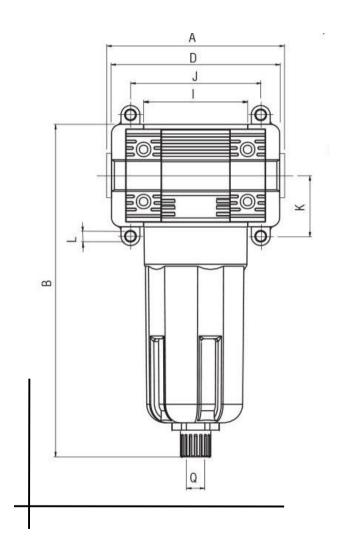




INFINITY



- Top solution for air distribution
- Push-in connection technology
- Calibrated aluminium tubes
- Fast and easy to install
- Energy saving
- Tested and certified

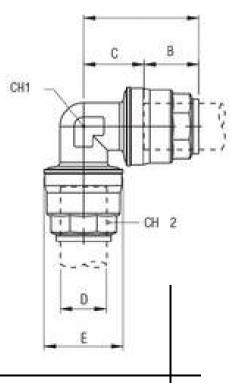



INFINITY












FLUIDITY




- Direct Assisted valves
- From 1/4 up to 1"
- Coming soon: up to 2"
- NBR FKM EPDM
- 40bar (direct) 25bar (assisted)
- Brass
- Stainless Steel



FLUIDITY

FLUIDITY – Excellent solutions in Fluidtechnology



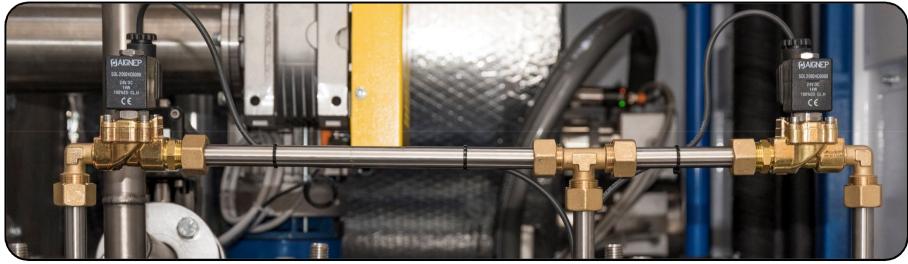



Thanks for attention